

POLYESTER FILM CAPACITORS

TYPE : PEN

(NON-INDUCTIVE, EPOXY COATED)


1. Low dissipation factor.
2. Small size.
3. Non-inductive.
4. High stability and reliability.



SPECIFICATIONS :

OPERATING TEMPERATURE	-40 ~ +85°C
RATED VOLTAGE	100, 160, 250, 400, 630V.D.C
CAPACITANCE RANGE	0.0068 ~ 0.47 μ F
DIELECTRIC STRENGTH	250% of rated voltage for 5 sec.
CAPACITANCE TOLERANCE	\pm 5% (J) \pm 10% (K)
INSULATION RESISTANCE	50,000M Ω min at 25°C
DISSIPATION FACTOR	1% MAX. at 1KHZ

TYPE : MEM

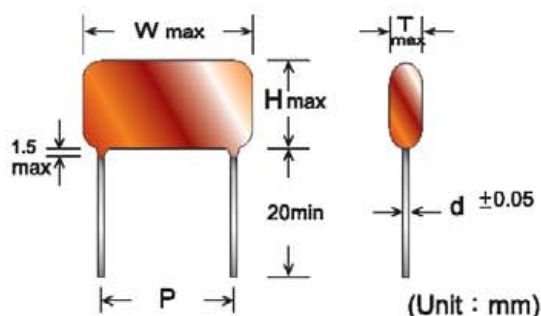

μ F SIZE	RV	100V	160V	250V	400V	630V
.0068					B-2	C-2
.0082				B-1	B-2	C-2
.01				B-1	B-2/C-2	C-2
.012				B-1	C-2	C-3
.015				B-1	C-2	C-3
.018				B-1	C-2	C-4
.022			B-2	B-2/C-2	C-3	C-4
.027			B-2	B-2/C-2	C-3	D-1
.033		B-2	B-2	C-2	C-4	D-1
.039		B-2	B-2	C-2	C-4	D-2
.047		B-2/C-2	C-2	C-3	C-4	D-2
.056		B-2/C-2	C-2	C-3	D-1	D-4
.068		C-2	C-3	C-3	D-2	D-4
.082		C-2	C-3	C-4	D-2	D-4
.1		C-3	C-3	C-5	D-4	D-4
.12		C-3	C-4	D-1	D-4	
.15		C-4	C-4	D-2	D-4	
.18		C-5	D-2	D-2		
.22		C-5	D-2	D-4		
.27		D-2	D-2			
.33		D-2	D-4			
.39		D-4				
.47		D-4				

CODE	W	H	T	P
A-2	8.0	8.0	4.0	5.0
B-1	10.5	8.0	4.0	7.5
B-2	11.0	10.0	5.0	7.5
C-2	13.0	10.0	5.0	10.0
C-3	13.0	11.0	6.0	10.0
C-4	13.0	13.0	7.0	10.0
C-5	13.0	15.0	8.0	10.0
D-1	18.0	12.0	6.0	15.0
D-2	18.0	13.5	7.0	15.0
D-3	18.0	15.0	8.0	15.0
D-4	18.5	16.5	9.5	15.0

Please contact us for special case or size items not listed.