


1970 Power Line Filters

1970 Series Shielded Facility Filters

Insertion Loss 100dB from 14kHz through 1 GHz Measured in Accordance with MIL-STD-220A at Full Load using Extended Range Buffer Networks.

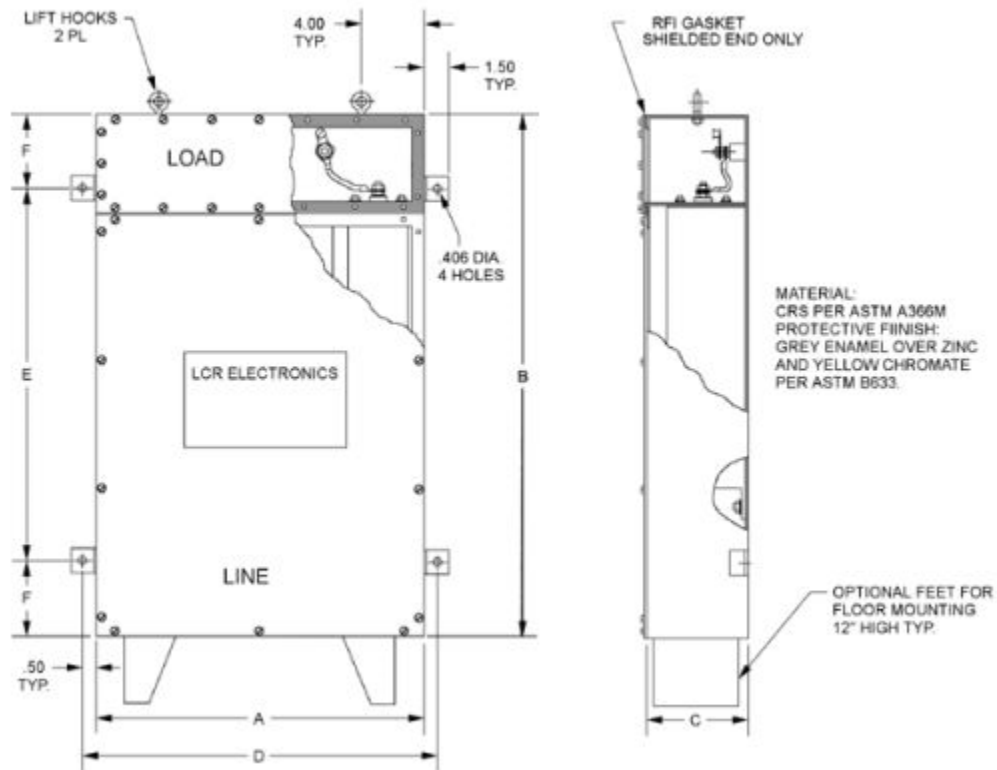

	I_{max}	Mechanical Dimension s (inches)						Approx. Weight
Part No.	Amps	A	B	C	D	E	F	Lbs
1971-2W	2 X 30	11	39	5	12.6	34	2.5	90
1971-3W	3 X 30	16	39	5	17.6	34	2.5	135
1971-4W	4 X 30	21	39	5	22.6	34	2.5	180
1972-2W	2 X 50	11	39	5	12.6	34	2.5	95
1972-3W	3 X 50	16	39	5	17.6	34	2.5	140
1972-4W	4 X 50	21	39	5	22.6	34	2.5	185
1974-2W	2 X 100	20	46	7	21.6	41	2.5	220
1974-3W	3 X 100	30	46	7	31.6	41	2.5	320
1974-4W	4 X 100	40	46	7	41.6	41	2.5	435
1976-2W	2 X 200	20	46	7	21.6	41	2.5	250
1976-3W	3 X 200	30	46	7	31.6	41	2.5	370
1976-4W	4 X 200	40	46	7	41.6	41	2.5	560

Filters are rated at 277 volts AC (600 volts DC) Line to ground at 50/60 HZ. Filters for 400HZ operation and higher current ratings are available upon request.

All filters are manufactured in accordance with UL 1283.

LCR will tailor enclosures to meet your exact needs